




Front end cylinder with outer cover

35-49 ton **Tipping weight** 

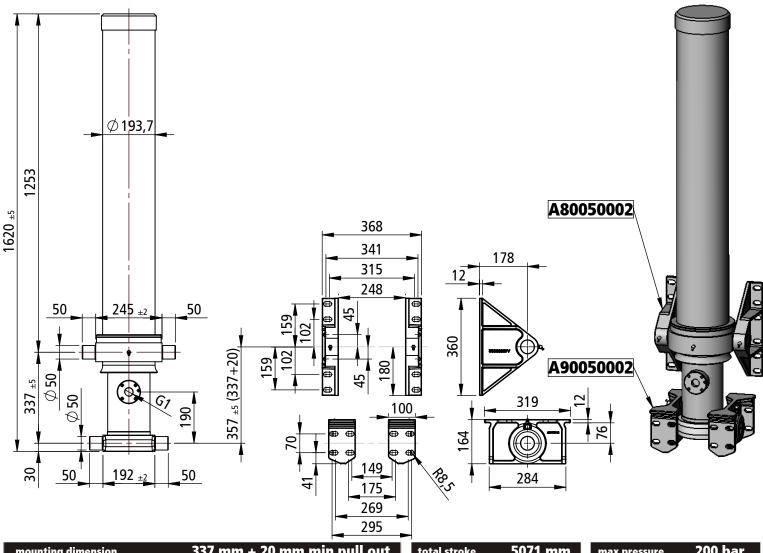

mounting dimension 3				337 mm + 20 mm min pull out						l stroke		5071 mm	max pressure	200 bar
model: PFC1500 5070 135 4					code: 4215001354001				weight: 220 kg			20 kg	HS Penta	
extension	1	2	3	4	-	-	-	-	-			number of s	stages: 4	
diameter [mm]	135	116	98	79										
stroke [mm]	1258	1262	1272	1279								total: 5071 i	mm	
thrust [kN]	286	211	151	98								max thrust	admitted: 130 kN	
oil [dm³]	18	13.3	9.6	6.3								total: 47.2 d	lm <sup>3</sup>	

# **TECHNICAL NOTES AND SPECIFICATIONS**

- The normal application of telescopic cylinder is to lift up tipping bodies, loaded with different materials, and consequently discharge this material whilst the cylinder is extended all along its stroke.
- The body weight plus the max payload are the max tipping weight that can be raised by the cylinder. This value, calculated at the max pressure, is a rough indication of the tipping power of the cylinder and must be used as a first criteria for the selection of the cylinder. The real tipping mass can only be calculated by the design engineer of the dump truck, and must take into account the geometry of the dump body and operating conditions. Never exceed the maximum thrust.

Never exceed maximum pressure. The cylinder has been designed for loads along the longitudinal axis: the cylinder is a lifting device only and may not be used as structural member or be subject to side load. The ordinary use of telescopic cylinder does not require any coating as the telescopic stages are exposed to atmospheric agents only during the tip-up operation. Therefore telescopic cylinders will be supplied without any coating in absence of any specific requirements.

H.S.PENTA warranty does not apply to any kind of corrosion of coated or non-coated parts. See terms of warranty. Maximum extension speed less than 0.2 m/s.

- Hydraulic oil temperature admitted between -40°C and +100°C.

In case the cylinders must be stored, do not remove the package. Store them in a dry place, not exposed to rain. Do not store the cylinders for more than 6 (six) months. Further specifications see mounting instructions, hydraulic oil specification sheet, user & maintenance manual.

## REMARKS

# [2007.02.16] [2007.02.16]

Last stage Ø79 chromed (Elemento terminale Ø79 cromato)

Old code: HPFC5070I (Codice vecchio: HPFC5070I)

## REVISIONS 01 2009.10.22 - Aggiornamento dati 02 03 04